


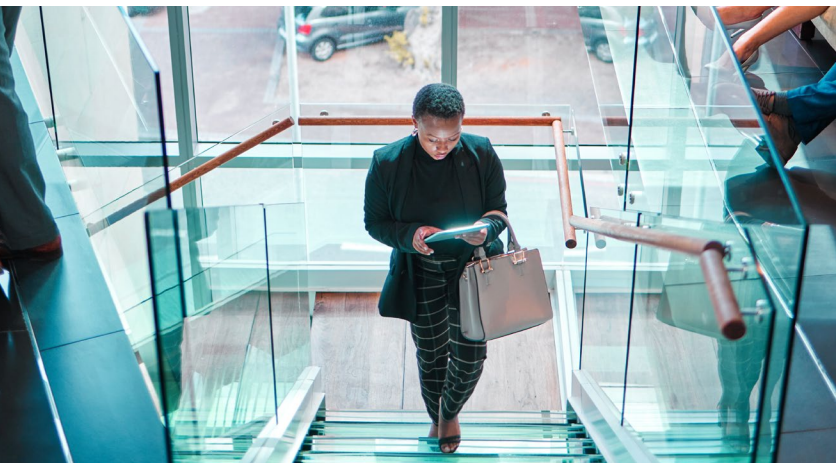

# Trellix File Protect

Detect and eliminate malware on file shares and content stores

## Overview

### Key benefits

- Finds latent malware undetected by traditional AV engines
- Deploys in active quarantine (protection) or analysis only (monitoring) modes
- Provides recursive, scheduled, and on-demand scans of CIFS and NFS compatible file shares
- Provides proactive protection for Microsoft OneDrive and SharePoint
- Includes analysis of a wide range of file types such as PDFs, Microsoft Office documents, and multimedia files
- Integrates with Trellix Endpoint Security to streamline incident response prioritization and naming conventions
- Shares threat data through Trellix Central Management and the Trellix Dynamic Threat Intelligence cloud

Trellix File Protect secures data assets across a wide range of file types against attacks that originate from email, online file transfer tools, the cloud, and portable file storage devices. Such attacks can spread to file shares and content repositories. File Protect analyzes network file shares and content management stores to detect and quarantine malware that bypasses next-generation firewalls, intrusion prevention systems (IPSs), antivirus (AV) systems, and gateways.

### Challenges of malware on file shares

Today's advanced cyberattacks use sophisticated malware and advanced persistent threat (APT) tactics to penetrate defenses and spread laterally through file shares and content repositories. This enables malware to establish a long-term foothold in the network and infect multiple systems, even those that are offline.

Many enterprise data centers remain especially vulnerable to advanced, content-based malware. That's because traditional defenses are ineffective against these attacks, which often enter the network through legitimate means. Adversaries leverage these vulnerabilities to spread malware into network file shares and embed malicious code in vast data stores, resulting in a persistent threat even after remediation.

### Importance of file content protection

Without a way to detect resting malware in content, APTs can exploit network assets to extract proprietary information and cause significant damage. File Protect analyzes file shares and enterprise content repositories using the patented Trellix Multi-Vector Virtual Execution (MVX) engine, which detects zero-day malicious code embedded in common file types (PDF, MS Office, vCards, ZIP/RAR/TNEF, etc.) and multimedia content (MP3, Real Player, JPG, PNG, etc.).

File Protect performs recursive, scheduled, and on-demand scanning of accessible network file shares and content stores to identify and quarantine resident malware. This halts a key stage of the advanced attack life cycle.

### Reveal unknown, zero-day threats

File Protect uses the MVX engine to inspect each file and confirm the existence of zero-day exploits or malicious code. The MVX engine detects zero-day, multi-flow, and other evasive attacks with dynamic, signature-less analysis in a safe, virtual environment. It stops the infection and compromise phases of the cyberattack kill chain by identifying never-before-seen exploits and malware.

### The power of MVX Smart Grid

Trellix MVX Smart Grid improves Trellix Network Security with a flexible and scalable deployment architecture via hybrid or private cloud. MVX Smart Grid uses an innovative approach to more effectively secure campuses, branch offices, and remote users by separating the MVX engine from hardware and virtual Smart Nodes. Smart Nodes analyze internet traffic to detect and block threats using a variety of techniques, such as static analysis, analytics, IPSs, applied intelligence, and more, while the MVX engine performs core dynamic analysis.

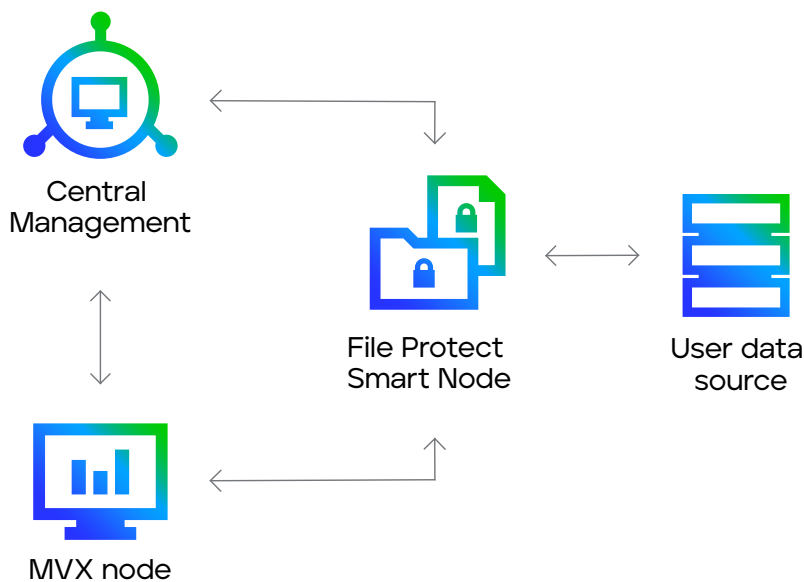


Figure 1. Sample Trellix File Protect deployment

## DATA SHEET

### Protect Microsoft OneDrive and SharePoint

File Protect continuously scans content to alert and permanently quarantine malware discovered in OneDrive and SharePoint repositories. It leverages WebDAV protocol to securely integrate with SharePoint services to protect enterprise business workflows that use SharePoint repositories.

### Enable customization with YARA-based rules

File Protect supports custom YARA rules to analyze large quantities of file threats specific to the organization.

### Streamline incident prioritization

With Trellix Endpoint Security, each malicious object can be further analyzed to determine if antivirus vendors were able to detect the malware stopped by File Protect.

This enables your organization to efficiently prioritize incident response follow-ups and use common naming conventions for known malware.

### Share malware intelligence

The resulting dynamically generated, real-time threat intelligence can help all Trellix products protect the local network through integration with Trellix Central Management.

This intelligence can be shared globally through the Trellix Dynamic Threat Intelligence (DTI) cloud to notify all subscribers of emerging threats.

### Deploy with no tuning and near-zero false positives

Unlike other security solutions, Trellix File Protect requires absolutely no tuning. Flexible deployment modes include analysis-only monitoring and active quarantining. This allows your company to learn how much malware is resident on file shares and to actively stop the lateral spread of malware.



DATA SHEET

Protection where you need it  
with Content Smart Nodes

With Trellix Content Smart Nodes content and security managers gain a flexible, virtual solution to protect mission-critical content throughout the enterprise. Coupled with the MVX Smart Grid, content protection scales and deploys seamlessly where it’s needed.

Deploy via flexible form factors

Choose between either virtual Content Smart Nodes or traditional on-premises hardware appliances to get the solution that’s ideal for your environment.



Table 1. Trellix Content Smart Node

| FX 2500V                |                            |
|-------------------------|----------------------------|
| OS support              | Microsoft Windows, MacOS X |
| Performance             | 40,000 files per day       |
| Network interface ports | Ether 1, Ether 2           |
| CPU cores               | 2                          |
| Memory                  | 8 GB                       |
| Drive capacity          | 512 GB                     |
| Hypervisor support      | VMWare ESXi 6.0 or later   |

## DATA SHEET

Table 2. Trellix technical specifications

|                                           | FX 6500                                                                                                                                                                   |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance                               | Up to 70,000 files per day                                                                                                                                                |
| Network interface ports                   | 2x 1 GigE BaseT                                                                                                                                                           |
| IPMI port (rear panel)                    | Included                                                                                                                                                                  |
| USB ports (rear panel)                    | 2x USB type A front, 2x USB type A rear                                                                                                                                   |
| Serial Port (rear panel)                  | 115,200 bps, no parity, 8 bits, 1 stop bit                                                                                                                                |
| Storage capacity                          | 4x 2TB RAID 10, HDD 3.5 inch, FRU                                                                                                                                         |
| Enclosure                                 | 2RU, fits 19-inch rack                                                                                                                                                    |
| Chassis dimensions (WxDxH)                | 17.24" x 24.41" x 3.48"<br>(438 x 620 x 88.4 mm)                                                                                                                          |
| AC power supply                           | Redundant (1+1) 800 watt, 100 - 240 VAC, 9 - 4.5A, 50-60 Hz, IEC60320-C14 inlet, FRU                                                                                      |
| Power consumption maximum                 | 530 watts                                                                                                                                                                 |
| Thermal dissipation maximum               | 1,808 BTU/h                                                                                                                                                               |
| MTBF                                      | 53,742 h                                                                                                                                                                  |
| Appliance alone/as shipped weight lb (kg) | 44.4 lbs (20.2 kg)/65.6 lbs (29.8 kg)                                                                                                                                     |
| Safety certifications                     | IEC 60950 EN 60950-1 UL 60950 CSA/CAN-C22.2                                                                                                                               |
| EMC/EMI certifications                    | FCC Part 15<br>ICES-003 Class A<br>AS/NZS CISPR 22<br>CISPR 32<br>EN 55032<br>EN 55024<br>IEC/EN 61000-3-2<br>IEC/EN 61000-3-3<br>IEC/EN 61000-4-2<br>V-2/2015 & V-3/2015 |
| Regulatory compliance                     | RoHS Directive 2011/65/EU; REACH; WEEE Directive 2012/19/EU                                                                                                               |
| Operating temperature                     | 0 - 35° C (32 - 95° F)                                                                                                                                                    |
| Operating relative humidity               | 10 - 95% @ 40° C, non-condensing                                                                                                                                          |
| Operating altitude                        | 3,000 m / 9,842 ft                                                                                                                                                        |

Trellix  
6220 American Center Drive  
San Jose, CA 95002  
[www.trellix.com](http://www.trellix.com)

To learn more about Trellix, visit [trellix.com](http://trellix.com).



#### About Trellix

Trellix is a global company redefining the future of cybersecurity. The company's open and native extended detection and response (XDR) platform helps organizations confronted by today's most advanced threats gain confidence in the protection and resilience of their operations. Trellix's security experts, along with an extensive partner ecosystem, accelerate technology innovation through machine learning and automation to empower over 40,000 business and government customers.

Copyright © 2022 Musarubra US LLC 052022-01